



NLS-FM30 Series

Fixed Mount Barcode Scanner

User Guide



Disclaimer

© 2015 Fujian Newland Auto-ID Tech. Co., Ltd. All rights reserved.

Please read through the manual carefully before using the product and operate it according to the manual. It is advised that you should keep this manual for future reference.

Do not disassemble the device or remove the seal label from the device, doing so will void the product warranty provided by Fujian Newland Auto-ID Tech. Co., Ltd.

All pictures in this manual are for reference only and actual product may differ. Regarding to the product modification and update, Fujian Newland Auto-ID Tech. Co., Ltd. reserves the right to make changes to any software or hardware to improve reliability, function, or design at any time without notice. The information contained herein is subject to change without prior notice.

The products depicted in this manual may include software copyrighted by Fujian Newland Auto-ID Tech. Co., Ltd or third party. The user, corporation or individual, shall not duplicate, in whole or in part, distribute, modify, decompile, disassemble, decode, reverse engineer, rent, transfer or sublicense such software without prior written consent from the copyright holders.

This manual is copyrighted. No part of this publication may be reproduced, distributed or used in any form without written permission from Newland.

Fujian Newland Auto-ID Tech. Co., Ltd. reserves the right to make final interpretation of the statement above.

Fujian Newland Auto-ID Tech. Co., Ltd.

3F, Building A, No.1, Rujiang West Rd., Mawei, Fuzhou, Fujian, China 350015

<http://www.nlscan.com>

Revision History

Version	Description	Date
V1.0	Initial release.	March 27, 2015

Table of Contents

Chapter 1 Standard Configuration	1
Chapter 2 Optional Configuration	2
Chapter 3 Safety Information	3
Precautions	3
Maintenance	3
Chapter 4 Product Features	4
Chapter 5 Technical Specifications	5
Chapter 6 FM30 Scanner	6
Chapter 7 Wiring.....	9
Chapter 8 Scanning Instructions.....	11
Reading a Digital Barcode off Mobile Phone	11
Reading a Barcode Printed on Paper.....	11
Chapter 9 System Settings.....	12
Illumination.....	12
Notification	13
Mute Mode	13
Good Read Beep	13
Good Read Beep Frequency/Duration	14
Scan Mode.....	15
Sense Mode.....	15
Factory Defaults.....	15
Digit Barcodes	15
Save/Cancel Barcodes	18
Chapter 10 RS-232 Interface	19
Chapter 11 USB Interface	20
HID-POS	20
USB COM Port Emulation	20
USB HID-KBW	20

Standard Keyboard.....	20
Function Key Mapping.....	20
Emulate ALT+Keypad.....	22
USB Country Keyboard Types	23

Chapter 12 Symbolologies 26

Introduction	26
Global Settings	26
Disable All Symbolologies	26
Enable All Symbolologies.....	26
Enable 1D Symbolologies	27
Disable 1D Symbolologies	27
Enable 2D Symbolologies	27
Disable 2D Symbolologies	27
Code 128	27
Restore Factory Defaults.....	27
Enable/Disable Code 128.....	28
UCC/EAN-128 (GS1-128)	29
Restore Factory Defaults.....	29
Enable/Disable UCC/EAN-128.....	29
AIM 128.....	30
Restore Factory Defaults.....	30
Enable/Disable AIM 128	30
EAN-8	31
Restore Factory Defaults.....	31
Enable/Disable EAN-8.....	31
Transmit Check Digit	31
2-Digit Add-On Code	32
5-Digit Add-On Code	32
EAN-8 Extension	32
EAN-13	34
Restore Factory Defaults.....	34
Enable/Disable EAN-13.....	34
Transmit Check Digit	34
2-Digit Add-On Code	35
5-Digit Add-On Code	35
ISSN.....	35


Restore Factory Defaults.....	35
Enable/Disable ISSN	36
ISBN.....	37
Restore Factory Defaults.....	37
Enable/Disable ISBN	37
Set ISBN Format.....	37
UPC-E.....	38
Restore Factory Defaults.....	38
Enable/Disable UPC-E	38
Transmit Check Digit	38
2-Digit Add-On Code	39
5-Digit Add-On Code	39
Transmit System Character.....	39
UPC-E Extension.....	40
UPC-A.....	41
Restore Factory Defaults.....	41
Enable/Disable UPC-A	41
Transmit Check Digit	41
2-Digit Add-On Code	42
5-Digit Add-On Code	42
Transmit Preamble Character	42
Interleaved 2 of 5.....	44
Restore Factory Defaults.....	44
Enable/Disable Interleaved 2 of 5	44
Check Digit Verification	45
ITF-6	46
Restore Factory Defaults.....	46
Enable/Disable ITF-6.....	46
ITF-14	47
Restore Factory Defaults.....	47
Enable/Disable ITF-14.....	47
Matrix 2 of 5 (European Matrix 2 of 5).....	48
Restore Factory Defaults.....	48
Enable/Disable Matrix 2 of 5.....	48
Check Digit Verification	49
Industrial 25	50
Restore Factory Defaults.....	50

Enable/Disable Industrial 25	50
Check Digit Verification	51
Standard 25	52
Restore Factory Defaults	52
Enable/Disable Standard 25	52
Check Digit Verification	53
Code 39	54
Restore Factory Defaults	54
Enable/Disable Code 39	54
Transmit Start/Stop Character	54
Enable/Disable Code 39 Full ASCII	55
Check Digit Verification	56
Codabar	57
Restore Factory Defaults	57
Enable/Disable Codabar	57
Check Digit Verification	58
Transmit Start/Stop Character	59
Code 93	60
Restore Factory Defaults	60
Enable/Disable Code 93	60
Check Digit Verification	61
Code 11	62
Restore Factory Defaults	62
Enable/Disable Code 11	62
Check Digit Verification	63
Plessey	64
Restore Factory Defaults	64
Enable/Disable Plessey	64
Check Digit Verification	65
MSI-Plessey	66
Restore Factory Defaults	66
Enable/Disable MSI-Plessey	66
Check Digit Verification	67
RSS-14	68
Restore Factory Defaults	68
Enable/Disable RSS-14	68
Transmit Application Identifier "01"	68


RSS-Limited.....	69
Restore Factory Defaults.....	69
Enable/Disable RSS- Limited	69
Transmit Application Identifier “01”	69
RSS-Expand.....	70
Restore Factory Defaults.....	70
Enable/Disable RSS-Expand.....	70
PDF417.....	71
Restore Factory Defaults.....	71
Enable/Disable PDF417	71
Macro PDF417.....	71
Data Matrix	72
Restore Factory Defaults.....	72
Enable/Disable Data Matrix	72
Enable/Disable Mirrored DM	72
Rectangular Barcodes	73
QR Code.....	74
Restore Factory Defaults.....	74
Enable/Disable QR Code	74
Micro QR.....	74
Chapter 13 Data Formatting	75
AIM ID Prefix.....	75
CODE ID Prefix.....	79
Terminating Character Suffix.....	81
Chapter 14 Troubleshooting.....	82

Chapter 1 Standard Configuration


1. NLS-FM30 Series fixed mount barcode scanner



2. USB cable




3. Quick Start Guide



Chapter 2 Optional Configuration

1. RS-232 cable



2. 5V power adapter



You should retain proof of purchase and ask your dealer for a warranty card.

Note: You should check to make sure that everything on the standard configuration list is present and intact after opening the package. If any contents are damaged or missing, please keep the original package and contact your dealer immediately for after-sale service.

Chapter 3 Safety Information

Precautions

■ Disassembly and retrofit

- Do not disassemble or retrofit the device yourself. Artificial damages caused by failure to observe this precaution are not covered by the warranty.

■ External power supply

- Use only the supplied power adapter. Otherwise there is a risk of damage to the scanner.

■ Abnormal situation

- Keep the scanner away from fire or heat sources. If there is unusual odor, overheating or smoke, immediately cut off the power and disconnect the power adapter, and contact your dealer or Newland customer service center. Continued use in this case may result in fire or electric shock.

■ Drop damage

- If the scanner is damaged due to a drop from high place, immediately cut off the power and contact your dealer or Newland customer service center.

■ Mounting location

- Do not place the scanner on unstable or uneven surfaces.
- Do not expose the scanner to humidity, dust or direct sunlight.

Maintenance

- The scan window should be kept clean using soft cloth or lens cleaning tissue. Do not use detergent to clean it.

- Do not scratch the scan window.

- Sudden temperature drops may cause condensation on the shell which could degrade the performance of the device. If condensation occurs, dry the device before use.

Chapter 4 Product Features

Designed primarily for such applications as electronic tickets/coupons, mobile marketing and office automation, the NLS-FM30 series fixed mount barcode scanner is able to read barcodes from paper and mobile phones.

It boasts the following features:

1. Digital barcode data capture

Capable of reading 1D and 2D barcodes off mobile phones.

2. Printed barcode data capture

Capable of reading 1D and 2D barcodes printed on paper.

3. Swift scanning

Delivers effortless, snappy and accurate reading of barcodes on various mobile phone LCD screens with different contrast ratios, colors and reflectances.


4. Easy to use

Simple configuration by scanning the programming barcodes provided in the user guide.


Chapter 5 Technical Specifications

Processor	IOTC 0370 CHIP
Interface	RS-232 (9.6~115.2Kbps)
	USB 1.1 (HID-KBW, HID-POS)
Image Sensor	752×480 CMOS
Symbologies	2D: PDF417, Data Matrix, QR Code 1D: EAN-13, EAN-8, UPC-A, UPC-E, ISSN, ISBN, Codabar, Code 128, Code 93, ITF-6, ITF-14, Interleaved 2 of 5, Industrial 2 of 5, Standard 2 of 5, Matrix 2 of 5, GS1 Databar (RSS-Expand, RSS-Limited, RSS-14), Code 39, Code 11, MSI-Plessey, Plessey
Scan Mode	Sense mode
Resolution	10 mil
Light Source	White LED
Scan Window	38.3mm*60.4mm
PCS	≥30%
FOV	Diagonal: 85°, Horizontal: 63.7°, Vertical: 70°
Ambient Light	0 ~ 100,000 LUX
Power Consumption	1.75W (max.)
Power Adapter	Output: DC5V, 0.5A, Input: AC100~240V, 50~60Hz
Notification	Beep
Dimensions	78.2mm(L) X 67.2mm (W) X 62mm(H)
Weight	300g
Operating Temperature	-10℃ to + 50℃
Storage Temperature	-20℃ to + 60℃
Humidity	5% - 95% (non-condensing)
Certification	FCC Part15 Class B, CE EMC Class B

Chapter 6 FM30 Scanner

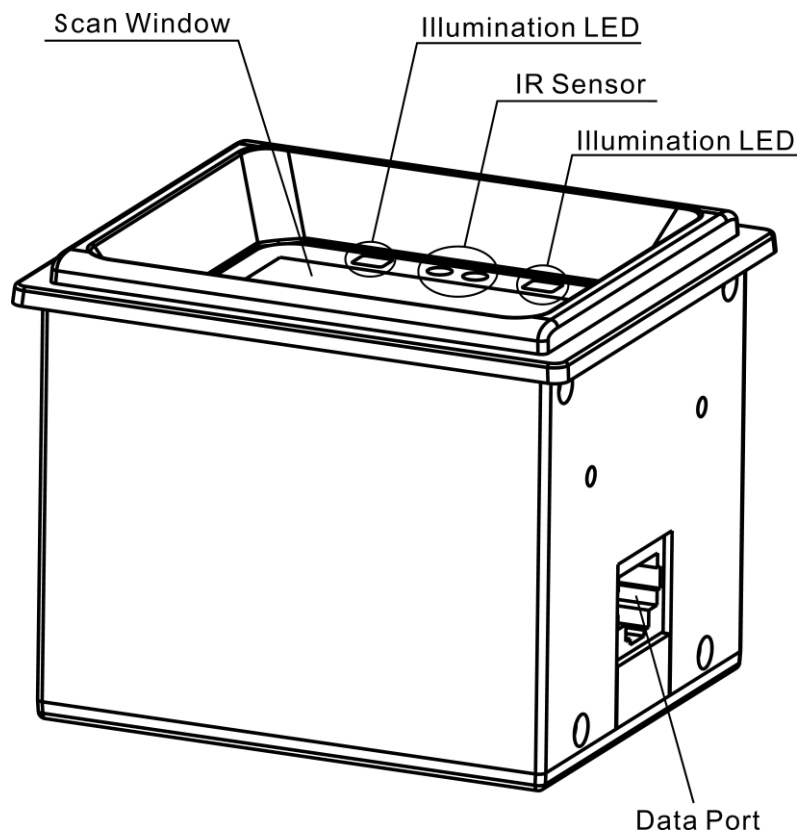


Overview of the FM30

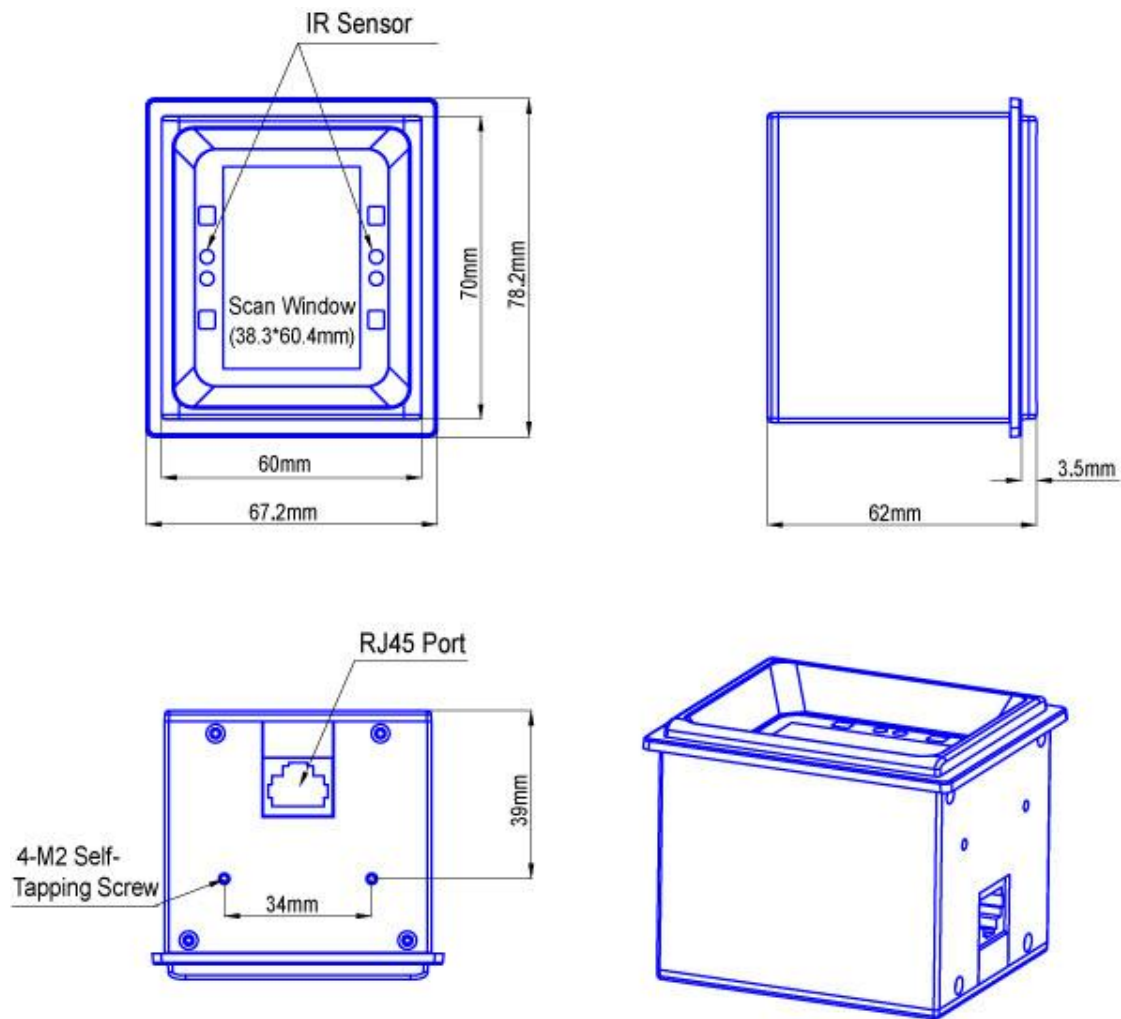

Note: M2 self-tapping screws should be used when mounting the scanner. The part of the screws into the shell of the scanner cannot exceed 7.5mm.

Three Views of the FM30

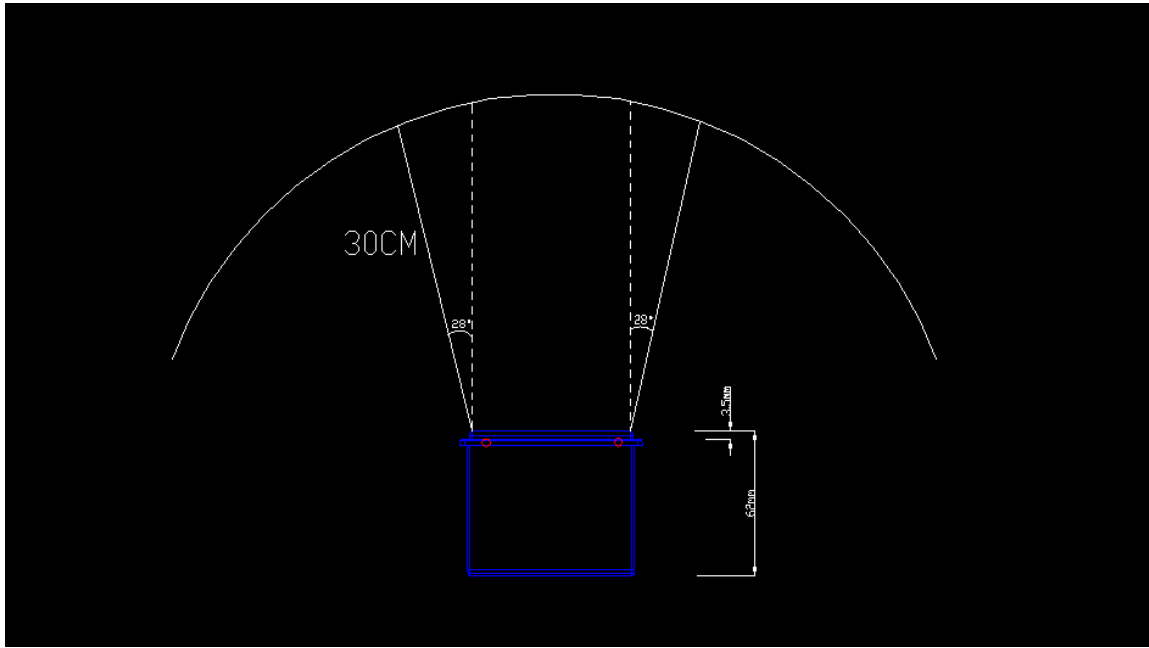


IR Triggering Range

Chapter 7 Wiring

1. If your scanner is equipped with an RS-232 interface:


- 1) Plug the supplied cable's RJ45 connector into the data port on the scanner.
- 2) Plug the cable's RS-232 connector into the RS-232 port on PC.
- 3) Plug the power adapter into the cable's power jack.

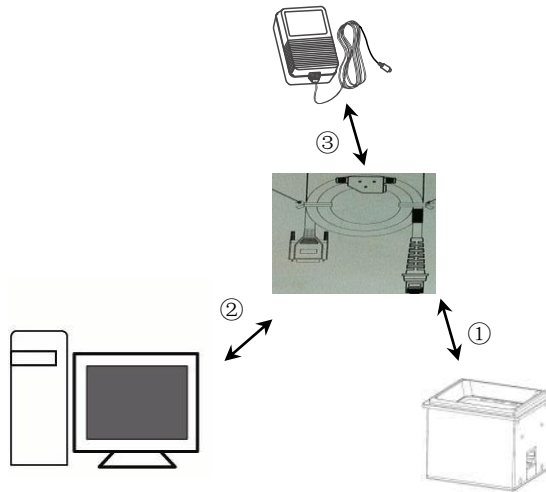

4) Connect the power adapter to a power outlet. After 0.5s the scanner will be powered on with a beep.

2. If your scanner is equipped with a USB interface:

- 1) Plug the supplied cable's RJ45 connector into the data port on the scanner.
- 2) Plug the cable's USB connector into the USB port on PC.

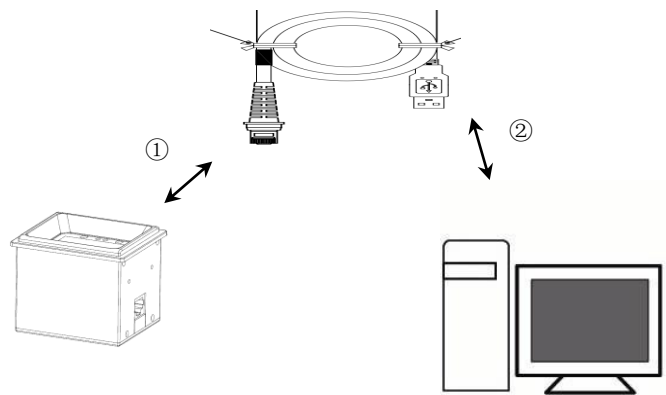

3) After 0.5s the scanner will be powered on with a beep.

Chapter 8 Scanning Instructions

Reading a Digital Barcode off Mobile Phone

1. Place the mobile phone screen close to the scan window and present the barcode to the center of the window, adjusting the distance between them within the range of 1cm-5cm.
2. For a successful read, the scanner will beep. After sending the data to the host, it will enter standby mode.

Reading a Barcode Printed on Paper

1. Place the paper close to the scan window and present the barcode to the center of the window, adjusting the distance between them within the range of 1cm-5cm.
2. For a successful read, the scanner will beep. After sending the data to the host, it will enter standby mode.

Chapter 9 System Settings

Illumination

Always ON: Illumination LED keeps ON after the scanner is powered on.

Normal: Illumination LED is turned on when the scanner is reading barcode.

OFF: Illumination LED is OFF all the time.



W0C0004

** Normal



W0C0000

OFF



W0C000C

Always ON

Notification

Mute Mode

Scanning the **Enable Mute Mode/Disable Mute Mode** can turn off/on all notification beeps.



W400000

Enable Mute Mode



W400040

** Disable Mute Mode

Good Read Beep



W040E04

** Good Read Beep On



W040E00

Good Read Beep Off

Good Read Beep Frequency/Duration



WFF09DA

Low Frequency



WFF094B

** Medium Frequency



WFF0925

High Frequency



WFF0A1F

40ms



WFF0A3E

** 80ms



WFF0A5D

120ms

Scan Mode

Sense Mode

The scanner activates a decode session every time when it detects a change in ambient illumination.



Factory Defaults

Scanning the following barcode can restore the scanner to the factory defaults.

You may need to reset your scanner when:

1. scanner is not properly configured so that it fails to decode barcodes;
2. you forget previous configuration and want to avoid its impact;
3. functions that are rarely used have been enabled for the time being.



Digit Barcodes

After scanning numeric barcode(s), you need to scan the **Save** barcode to save the data.





D00000A

A



D00000B

B



D00000C

C



D00000D

D



D00000E

E



D00000F

F


Save/Cancel Barcodes

After reading numeric barcode(s), you need to scan the **Save** barcode to save the data. If you scan the wrong digit(s), you can either scan the **Cancel the Last Digit** barcode and then the correct digit, or scan the **Cancel All Digits** barcode and then the digits you want.

For instance, after reading the **Decode Session Timeout** barcode and numeric barcodes “1”, “2” and “3”, you scan:

Cancel the Last Digit: The last digit “3” will be removed.

Cancel All Digits: All digits “123” will be removed.



D 0 0 0 0 1 2

Save



D 0 0 0 0 1 0

Cancel the Last Digit



D 0 0 0 0 1 1

Cancel All Digits

Chapter 10 RS-232 Interface

When the scanner is connected to a host device through its RS-232 interface, serial communication is enabled by default. However, to ensure smooth communication and accuracy of data, you need to set the scanner's communication parameters (including baud rate) to match the host's settings. The default settings of the scanner are 115200bps, no parity check, 8 data bits and 1 stop bit.



WFFD9D3

Baud Rate 9600



WFFD9D0

Baud Rate 1200



WFFD9D1

Baud Rate 2400



WFFD9D2

Baud Rate 4800



WFFD9D4

Baud Rate 14400



WFFD9D5

Baud Rate 19200



WFFD9D6

Baud Rate 38400



WFFD9D7

Baud Rate 57600



WFFD9D8

**** Baud Rate 115200**

Chapter 11 USB Interface

When the scanner is connected to a host device through its USB interface, **USB HID-KBW** is enabled by default. You may switch to **HID-POS** or **USB COM Port Emulation** by scanning the appropriate barcode below.

HID-POS



USB COM Port Emulation



USB HID-KBW



Three methods of input are provided for USB HID-KBW: Standard Keyboard, Function Key Mapping, Emulate ALT+Keypad.

Standard Keyboard



**** Standard Keyboard**

Function Key Mapping

When **Function Key Mapping** is enabled, function character (0x00 - 0x1F) are sent as ASCII sequences over the numeric keypad.

1. CTRL Make
2. Press function key (Refer to the **ASCII Function Key Mapping Table** on the following page)
3. CTRL Break



Function Key Mapping

ASCII Function Key Mapping Table

ASCII(HEX)	Function key	ASCII(HEX)	Function key
00	2	10	P
01	A	11	Q
02	B	12	R
03	C	13	S
04	D	14	T
05	E	15	U
06	F	16	V
07	G	17	W
08	H	18	X
09	I	19	Y
0A	J	1A	Z
0B	K	1B	[
0C	L	1C	\
0D	M	1D	]
0E	N	1E	6
0F	O	1F	.

Emulate ALT+Keypad

When **Emulate ALT+Keypad** is enabled, any ASCII character (0x00 - 0xFF) is sent over the numeric keypad no matter which keyboard type is selected.

1. ALT Make
2. Enter the number corresponding to the ASCII character on the keypad.
3. ALT Break



W066004

Emulate ALT+Keypad

USB Country Keyboard Types



WFF6B00

**** 1 - U.S.**



WFF6B01

2 - Belgium



WFF6B02

3 - Brazil



WFF6B03

4 - Canada



WFF6B04

5 - Czech



WFF6B05

6 - Denmark



WFF6B06

7 - Finland



WFF6B07

8 - France



WFF6B08

9 - Austria



WFF6B09

10 - Greece



WFF6B0A

11 - Hungary



WFF6B0B

12 - Israel



WFF6B0C

13 - Italy



WFF6B0D

14 - Latin America



WFF6B0E

15 - Netherland



WFF6B0F

16 - Norway



WFF6B10

17 - Poland



WFF6B11

18 - Portugal



WFF6B12

19 - Romania



WFF6B13

20 - Russia



WFF6B15

21 - Slovakia



WFF6B16

22 - Spain



WFF6B17

23 - Sweden



WFF6B18

24 - Switzerland



WFF6B19

25 - Turkey1



WFF6B1A

26 - Turkey 2



WFF6B1B

27 - UK



WFF6B1C

28 - Japan

Chapter 12 Symbolologies

Introduction

Every symbology (barcode type) has its own unique attributes. This chapter provides programming barcodes for configuring the scanner so that it can identify various barcode symbologies. It is recommended to disable those that are rarely used to increase the efficiency of the scanner.

Global Settings

Disable All Symbolologies

If all symbologies are disabled, the scanner can only identify programming barcodes.



WFFD982

Disable All Symbolologies

Enable All Symbolologies



WFFD981

Enable All Symbolologies

Enable 1D Symbologies



WFFD983

Enable 1D Symbologies

Disable 1D Symbologies



WFFD984

Disable 1D Symbologies

Enable 2D Symbologies



WFFD985

Enable 2D Symbologies

Disable 2D Symbologies



WFFD986

Disable 2D Symbologies

Code 128

Restore Factory Defaults



WFFD990

Restore the Factory Defaults of Code 128

Enable/Disable Code 128



W011601

**** Enable Code 128**



W011600

Disable Code 128

UCC/EAN-128 (GS1-128)

Restore Factory Defaults



WFFD991

Restore the Factory Defaults of UCC/EAN-128

Enable/Disable UCC/EAN-128



W011701

** Enable UCC/EAN-128



W011700

Disable UCC/EAN-128

AIM 128

Restore Factory Defaults



WFFD992

Restore the Factory Defaults of AIM 128

Enable/Disable AIM 128



W101610

** Enable AIM 128



W101600

Disable AIM 128

EAN-8

Restore Factory Defaults



WFFD994

Restore the Factory Defaults of EAN-8

Enable/Disable EAN-8



W011301

**** Enable EAN-8**



W011300

Disable EAN-8

Transmit Check Digit

EAN-8 is 8 digits in length with the last one as its check digit used to verify the integrity of the data.



W041304

**** Transmit Check Digit**



W041300

Do Not Transmit Check Digit

2-Digit Add-On Code

An EAN-8 barcode can be augmented with a two-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is an EAN-8 barcode while the part circled by red dotted line is add-on code.



Enable 2-Digit Add-On Code



** Disable 2-Digit Add-On Code

5-Digit Add-On Code

An EAN-8 barcode can be augmented with a five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is an EAN-8 barcode while the part circled by red dotted line is add-on code.



Enable 5-Digit Add-On Code



** Disable 5-Digit Add-On Code

EAN-8 Extension

Disable EAN-8 Zero Extend: Transmit EAN-8 barcodes as is.

Enable EAN-8 Zero Extend: Add five leading zeros to decoded EAN-8 barcodes to extend to 13 digits.



**** Disable EAN-8 Zero Extend**



Enable EAN-8 Zero Extend

EAN-13

Restore Factory Defaults



WFFD995

Restore the Factory Defaults of EAN-13

Enable/Disable EAN-13



W011101

** Enable EAN-13



W011100

Disable EAN-13

Transmit Check Digit

EAN-13 is 13 digits in length with the last one as its check digit used to verify the integrity of the data.



W041104

** Transmit Check Digit



W041100

Do Not Transmit Check Digit

2-Digit Add-On Code

An EAN-13 barcode can be augmented with a two-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is an EAN-8 barcode while the part circled by red dotted line is add-on code.



Enable 2-Digit Add-On Code



** Disable 2-Digit Add-On Code

5-Digit Add-On Code

An EAN-13 barcode can be augmented with a five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is an EAN-8 barcode while the part circled by red dotted line is add-on code.



Enable 5-Digit Add-On Code



** Disable 5-Digit Add-On Code

ISSN

Restore Factory Defaults



WFFD996

Restore the Factory Defaults of ISSN

Enable/Disable ISSN



W401140

Enable ISSN



W401100

** Disable ISSN

ISBN

Restore Factory Defaults



WFFD997

Restore the Factory Defaults of ISBN

Enable/Disable ISBN



W011201

** Enable ISBN



W011200

Disable ISBN

Set ISBN Format



W041200

** ISBN-13



W041204

ISBN-10

UPC-E

Restore Factory Defaults



WFFD998

Restore the Factory Defaults of UPC-E

Enable/Disable UPC-E



W011501

**** Enable UPC-E**



W011500

Disable UPC-E

Transmit Check Digit

UPC-E is 8 digits in length with the last one as its check digit used to verify the integrity of the data.



W041504

**** Transmit Check Digit**



W041500

Do Not Transmit Check Digit

2-Digit Add-On Code

A UPC-E barcode can be augmented with a two-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is a UPC-E barcode while the part circled by red dotted line is add-on code.



Enable 2-Digit Add-On Code



** Disable 2-Digit Add-On Code

5-Digit Add-On Code

A UPC-E barcode can be augmented with a five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is a UPC-E barcode while the part circled by red dotted line is add-on code.



Enable 5-Digit Add-On Code



** Disable 5-Digit Add-On Code

Transmit System Character



W081508

Transmit System Character "0"



W081500

** Do Not Transmit System Character "0"

UPC-E Extension

Disable UPC-E Extend: Transmit UPC-E barcodes as is.

Enable UPC-E Extend: Extend UPC-E barcodes to make them compatible in length to UPC-A.



W801580

Enable UPC-E Extend



W801500

** Disable UPC-E Extend

UPC-A

Restore Factory Defaults



WFFD999


Restore the Factory Defaults of UPC-A

Enable/Disable UPC-A



W011401

** Enable UPC-A



W011400

Disable UPC-A

Transmit Check Digit

UPC-A is 13 digits in length with the last one as its check digit used to verify the integrity of the data.



W041404

** Transmit Check Digit



W041400

Do Not Transmit Check Digit

2-Digit Add-On Code

A UPC-A barcode can be augmented with a two-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is a UPC-E barcode while the part circled by red dotted line is add-on code.



Enable 2-Digit Add-On Code



** Disable 2-Digit Add-On Code

5-Digit Add-On Code

A UPC-A barcode can be augmented with a five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is a UPC-E barcode while the part circled by red dotted line is add-on code.



Enable 5-Digit Add-On Code



** Disable 5-Digit Add-On Code

Transmit Preamble Character



W081408

Transmit Preamble Character "0"



W081400

** Do Not Transmit Preamble Character "0"

Interleaved 2 of 5

Restore Factory Defaults



WFFD99A

Restore the Factory Defaults of Interleaved 2 of 5

Enable/Disable Interleaved 2 of 5



W011801

** Enable Interleaved 2 of 5



W011800

Disable Interleaved 2 of 5

Check Digit Verification

A check digit is optional for Interleaved 2 of 5 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Interleaved 2 of 5 barcodes as is.

Do Not Transmit Check Digit after Verification: The scanner checks the integrity of all Interleaved 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit after Verification: The scanner checks the integrity of all Interleaved 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W0C1800

**** Disable**



W0C1804

Do Not Transmit Check Digit after Verification



W0C180C

Transmit Check Digit after Verification

ITF-6

Restore Factory Defaults



WFFD99B

Restore the Factory Defaults of ITF-6

Enable/Disable ITF-6



W011900

** Disable ITF-6



W051901

Enable ITF-6 But Do Not Transmit Check Digit



W051905

Enable ITF-6 and Transmit Check Digit

ITF-14

Restore Factory Defaults



WFFD99C

Restore the Factory Defaults of ITF-14

Enable/Disable ITF-14



W201800

Disable ITF-14



WA01820

Enable ITF-14 But Do Not Transmit Check Digit



WA018A0

** Enable ITF-14 and Transmit Check Digit

Matrix 2 of 5 (European Matrix 2 of 5)

Restore Factory Defaults



WFFD99F

Restore the Factory Defaults of Matrix 2 of 5

Enable/Disable Matrix 2 of 5



W011A01

** Enable Matrix 2 of 5



W011A00

Disable Matrix 2 of 5

Check Digit Verification

A check digit is optional for Matrix 2 of 5 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Matrix 2 of 5 barcodes as is.

Do Not Transmit Check Digit After Verification: The scanner checks the integrity of all Matrix 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification: The scanner checks the integrity of all Matrix 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W041A00

**** Disable**



W0C1A04

Do Not Transmit Check Digit after Verification



W0C1A0C

Transmit Check Digit after Verification

Industrial 25

Restore Factory Defaults



WFFD9A0

Restore the Factory Defaults of Industrial 25

Enable/Disable Industrial 25



W081908

**** Enable Industrial 25**



W081900

Disable Industrial 25

Check Digit Verification

A check digit is optional for Industrial 25 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Industrial 25 barcodes as is.

Do Not Transmit Check Digit after Verification: The scanner checks the integrity of all Industrial 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit after Verification: The scanner checks the integrity of all Industrial 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W201900

**** Disable**



W601920

Do Not Transmit Check Digit after Verification



W601960

Transmit Check Digit after Verification

Standard 25

Restore Factory Defaults



WFFD9A1

Restore the Factory Defaults of Standard 25

Enable/Disable Standard 25



W101A10

**** Enable Standard 25**



W101A00

Disable Standard 25

Check Digit Verification

A check digit is optional for Standard 25 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Standard 25 barcodes as is.

Do Not Transmit Check Digit after Verification: The scanner checks the integrity of all Standard 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit after Verification: The scanner checks the integrity of all Standard 25 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W401A00

**** Disable**



WC01A40

Do Not Transmit Check Digit after Verification



WC01AC0

Transmit Check Digit after Verification

Code 39

Restore Factory Defaults



WFFD9A2

Restore the Factory Defaults of Code 39

Enable/Disable Code 39



W011C01

** Enable Code 39



W011C00

Disable Code 39

Transmit Start/Stop Character

Code 39 uses an asterisk (*) for both the start and the stop characters. You can choose whether or not to transmit the start/stop characters by scanning the appropriate barcode below.



W041C04

Transmit Start/Stop Character



W041C00

** Do Not Transmit Start/Stop Character

Enable/Disable Code 39 Full ASCII

The scanner can be configured to identify all ASCII characters by scanning the appropriate barcode below.



**** Disable Code 39 Full ASCII**



Enable Code 39 Full ASCII

Check Digit Verification

A check digit is optional for Code 39 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The scanner transmits Code 39 barcodes as is.

Do Not Transmit Check Digit after Verification: The scanner checks the integrity of all Code 39 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit after Verification: The scanner checks the integrity of all Code 39 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.



W081C00

**** Disable**



W181C08

Do Not Transmit Check Digit after Verification



W181C18

Transmit Check Digit after Verification

Codabar

Restore Factory Defaults



WFFD9A3

Restore the Factory Defaults of Codabar

Enable/Disable Codabar



W011E01

** Enable Codabar



W011E00

Disable Codabar

Check Digit Verification

Check digits are optional for Codabar and can be added as the last two digits, which are calculated values used to verify the integrity of the data.

Disable: The scanner transmits Codabar barcodes as is.

Do Not Transmit Check Digit after Verification: The scanner checks the integrity of all Codabar barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted except the last two digits, whereas those failing them will not be transmitted.

Transmit Check Digit after Verification: The scanner checks the integrity of all Codabar barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted, whereas those failing them will not be transmitted.



W101E00

**** Disable**



W301E10

Do Not Transmit Check Digit after Verification



W301E30

Transmit Check Digit after Verification

Transmit Start/Stop Character



W021E00

Do Not Transmit Start/Stop Character



W021E02

**** Transmit Start/Stop Character**



W0C1E00

**** ABCD/ABCD as the Start/Stop Character**



W0C1E04

ABCD/TN*E as the Start/Stop Character



W0C1E08

abcd/abcd as the Start/Stop Character



W0C1E0C

abcd/tn*e as the Start/Stop Character

Code 93

Restore Factory Defaults



WFFD9A4

Restore the Factory Defaults of Code 93

Enable/Disable Code 93



W081208

** Enable Code 93



W081200

Disable Code 93

Check Digit Verification

Check digits are optional for Code 93 and can be added as the last two digits, which are calculated values used to verify the integrity of the data.

Disable: The scanner transmits Code 93 barcodes as is.

Do Not Transmit Check Digit after Verification: The scanner checks the integrity of all Code 93 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted except the last two digits, whereas those failing them will not be transmitted.

Transmit Check Digit after Verification: The scanner checks the integrity of all Code 93 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted, whereas those failing them will not be transmitted.



W201200

Disable



W601220

**** Do Not Transmit Check Digit after Verification**



W601260

Transmit Check Digit after Verification

Code 11

Restore Factory Defaults



WFFD9A5

Restore the Factory Defaults of Code 11

Enable/Disable Code 11



W011D01

** Enable Code 11



W011D00

Disable Code 11

Check Digit Verification

Check digits are optional for Code 11 and can be added as the last one or two digits, which are calculated values used to verify the integrity of the data.

If the **Disable** option is enabled, the scanner transmits Code 11 barcodes as is.



W1C1D00

Disable



W1C1D04

**** One Check Digit, MOD11**



W1C1D08

Two Check Digits, MOD11/MOD11



W1C1D0C

Two Check Digits, MOD11/MOD9



W1C1D10

One Check Digit, MOD11 (Len <= 11)
Two Check Digits, MOD11/MOD11 (Len > 11)



W1C1D14

One Check Digit, MOD11 (Len <= 11)
Two Check Digits, MOD11/MOD9 (Len > 11)



W201D00

Do Not Transmit Check Digit



W201D20

**** Transmit Check Digit**

Plessey

Restore Factory Defaults



WFFD9A6

Restore the Factory Defaults of Plessey

Enable/Disable Plessey



W011F01

** Enable Plessey



W011F00

Disable Plessey

Check Digit Verification

Check digits are optional for Plessey and can be added as the last one or two digits, which are calculated values used to verify the integrity of the data.

Disable: The scanner transmits Plessey barcodes as is.

Do Not Transmit Check Digit after Verification: The scanner checks the integrity of all Plessey barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted except the last two digits, whereas those failing them will not be transmitted.

Transmit Check Digit after Verification: The scanner checks the integrity of all Plessey barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the checks will be transmitted, whereas those failing them will not be transmitted.



W021F00

Disable



W061F02

**** Do Not Transmit Check Digit after Verification**



W061F06

Transmit Check Digit after Verification

MSI-Plessey

Restore Factory Defaults



WFFD9A7

Restore the Factory Defaults of MSI-Plessey

Enable/Disable MSI-Plessey



W081F08

** Enable MSI-Plessey



W081F00

Disable MSI-Plessey

Check Digit Verification

Check digits are optional for MSI-Plessey and can be added as the last one or two digits, which are calculated values used to verify the integrity of the data.

If the **Disable** option is enabled, the scanner transmits MSI-Plessey barcodes as is.



W301F00

Disable



W301F10

** One Check Digit, MOD10



W301F20

Two Check Digits, MOD10/MOD10



W301F30

Two Check Digits, MOD10/MOD11



W401F00

Do Not Transmit Check Digit



W401F40

** Transmit Check Digit

RSS-14

Restore Factory Defaults



WFFD9A8

Restore the Factory Defaults of RSS-14

Enable/Disable RSS-14



W011B01

** Enable RSS-14



W011B00

Disable RSS-14

Transmit Application Identifier “01”



W041B04

** Transmit Application Identifier “01”



W041B00

Do Not Transmit Application Identifier “01”

RSS-Limited

Restore Factory Defaults



WFFD9A9

Restore the Factory Defaults of RSS-Limited

Enable/Disable RSS- Limited



W081B08

** Enable RSS-Limited



W081B00

Disable RSS-Limited

Transmit Application Identifier “01”



W201B20

** Transmit Application Identifier “01”



W201B00

Do Not Transmit Application Identifier “01”

RSS-Expand

Restore Factory Defaults



WFFD9AA

Restore the Factory Defaults of RSS-Expand

Enable/Disable RSS-Expand



W401B40

** Enable RSS-Expand



W401B00

Disable RSS-Expand

PDF417

Restore Factory Defaults



WFFD9B0

Restore the Factory Defaults of PDF417

Enable/Disable PDF417



W010C01

** Enable PDF417



W010C00

Disable PDF417

Macro PDF417



W100C10

Enable Macro PDF417



W100C00

** Disable Macro PDF417

Data Matrix

Restore Factory Defaults



WFFD9B1

Restore the Factory Defaults of Data Matrix

Enable/Disable Data Matrix



W080C08

** Enable Data Matrix



W080C00

Disable Data Matrix

Enable/Disable Mirrored DM



W0C4A0C

Enable Mirrored DM



W0C4A00

** Disable Mirrored DM

Rectangular Barcodes

Data Matrix has two formats:

Square barcodes having the same amount of modules in length and width: 10*10, 12*12.... 144*144.

Rectangular barcodes having different amounts of models in length and width: 6*16, 6*14... 14*22.



**** Decode Rectangular Barcodes**



Do Not Decode Rectangular Barcodes

QR Code

Restore Factory Defaults



WFFD9B2

Restore the Factory Defaults of QR Code

Enable/Disable QR Code



W800D80

** Enable QR Code



W800D00

Disable QR Code

Micro QR

This parameter is valid only when QR Code is enabled.



W049904

** Enable Micro QR



W049900

Disable Micro QR

Chapter 13 Data Formatting

AIM ID Prefix

AIM (Automatic Identification Manufacturers) IDs define symbology identifiers and data carrier identifiers. For the details, see the **AIM ID Table**. If AIM ID prefix is enabled, the engine will add the symbology identifier before the scanned data after decoding.



WFFD9C1

**** Disable AIM ID Prefix**



WFFD9C0

Enable AIM ID Prefix

AIM ID Table

Symbology	AIM ID	Remark
Code 128	]C0	Standard Code 128
UCC/EAN 128 (GS1-128)	]C1	FNC1 is the character right after the start character
AIM 128	]C2	FNC1 is the 2nd character after the start character
EAN-8	]E4	Standard EAN-8
	]E4....]E1...	EAN-8 + 2-Digit Add-On Code
	]E4....]E2...	EAN-8 + 5-Digit Add-On Code
EAN-13	]E0	Standard EAN-13
	]E3	EAN-13 + 2/5-Digit Add-On Code
ISSN	]X5	
ISBN	]X4	
UPC-E	]E0	Standard UPC-E
	]E3	UPC-E + 2/5-Digit Add-On Code
UPC-A	]E0	Standard UPC-A
	]E3	UPC-A + 2/5-Digit Add-On Code
Interleaved 2 of 5	]I0	No check digit verification
	]I1	Transmit check digit after verification
	]I3	Do not transmit check digit after verification
ITF-6	]I1	Transmit check digit
	]I3	Do not transmit check digit
ITF-14	]I1	Transmit check digit
	]I3	Do not transmit check digit
Matrix 2 of 5	]X1	No check digit verification
	]X2	Transmit check digit after verification
	]X3	Do not transmit check digit after verification
Industrial 25	]S0	Not specified
Standard 25	]R0	No check digit verification
	]R8	One check digit, MOD 7; do not transmit check digit
	]R9	One check digit, MOD 7; transmit check digit

Symbology	AIM ID	Remark
Code 39	JA0	Transmit barcodes as is; Full ASCII disabled; no check digit verification
	JA1	One check digit, MOD 43; transmit check digit
	JA3	One check digit, MOD 43; do not transmit check digit
	JA4	Full ASCII enabled; no check digit verification
	JA5	Full ASCII enabled; MOD43; transmit check digit
	JA7	Full ASCII enabled; MOD43; do not transmit check digit
Codabar	JF0	Standard Codabar
	JF1	ABC Codabar
	JF2	Transmit check digit after verification
	JF4	Do not transmit check digit after verification
Code 93	JG0	Not specified
Code 11	JH0	One check digit, MOD11; transmit check digit
	JH1	Two check digits, MOD11/MOD11; transmit check digit
	JH3	Do not transmit check digit after verification
	JH8	Two check digits, MOD11/MOD9; transmit check digit
	JH9	No check digit verification
Plessey	JP0	Not specified
MSI-Plessey	JM0	One check digit, MOD10; transmit check digit
	JM1	One check digit, MOD10; do not transmit check digit
	JM7	Two check digits, MOD10 /MOD11; do not transmit check digit
	JM8	Two check digits, MOD10 /MOD11; transmit check digit
	JM9	No check digit verification
RSS-14 RSS-Limited RSS-Expand	Je0	Standard
	Je1	User-defined
	Je2	User-defined
	Je3	User-defined
PDF417	JL0	Comply with 1994 PDF417 specifications
Data Matrix	jd0	ECC 000 - 140
	jd1	ECC 200
	jd2	ECC 200; FNC1 is the 1st or 5th character after the start character

Symbology	AIM ID	Remark
	]d3	ECC 200; FNC1 is the 2nd or 6th character after the start character
	]d4	ECC 200, ECI protocol supported
	]d5	ECC 200; FNC1 is the 1st or 5th character after the start character; ECI supported
	]d6	ECC 200; FNC1 is the 2nd or 6th character after the start character; ECI supported
QR Code	]Q0	QR1 (comply with AIM ISS 97-001 specifications)
	]Q1	QR2 (2005 symbol), ECI protocol not supported
	]Q2	QR2 (2005 symbol), ECI protocol supported
	]Q3	QR2 (2005 symbol), ECI protocol not supported; FNC1 is the character right after the start character
	]Q4	QR2 (2005 symbol), ECI protocol supported; FNC1 is the character right after the start character
	]Q5	QR2 (2005 symbol), ECI protocol not supported; FNC1 is the 2nd character right after the start character
	]Q6	QR2 (2005 symbol), ECI protocol supported; FNC1 is the 2nd character right after the start character

CODE ID Prefix

Code ID can also be used to identify barcode type. For the details, see the **CODE ID Table**.



W800200

**** Disable CODE ID Prefix**



W800280

Enable CODE ID Prefix

You can choose to transmit original CODE ID or visible CODE ID by scanning the appropriate barcode below.



W018A00

**** Original CODE ID**



W018A01

Visible CODE ID

CODE ID Table

Symbology	Original Code ID	Visible Code ID
Code 128 FNC3	0x01	A(0x41)
Code 128	0x02	B(0x42)
UCC/EAN 128	0x03	C(0x43)
EAN-8	0x04	D(0x44)
EAN-13	0x05	E(0x45)
UPC-E	0x06	F(0x46)
UPC-A	0x07	G(0x47)
Interleaved 2 of 5	0x08	H(0x48)
ITF-14	0x09	I(0x49)
ITF-6	0x0A	J(0x4A)
Code 39	0x0D	M(0x4D)
Codabar	0x0F	O(0x4F)
Standard 25	0x10	P(0x50)
Code 93	0x11	Q(0x51)
AIM 128	0x15	U(0x55)
MSI-Plessey	0x16	V(0x56)
ISBN	0x17	W(0x57)
Industrial 25	0x18	X(0x58)
Matrix 2 of 5	0x19	Y(0x59)
RSS-14	0x1A	Z(0x5A)
RSS-Limited	0x1B	[(0x5B)
RSS-Expand	0x1C	\(0x5C)
Code 11	0x1D	](0x5D)
Plessey	0x1E	^(0x5E)
ISSN	0x1F	_(0x5F)
PDF417	0x20	`(0x60)
QR Code	0x21	a(0x61)
Data Matrix	0x23	c(0x63)

Terminating Character Suffix

A terminating character such as carriage return (CR) or carriage return/line feed pair (CRLF) or horizontal tab (TAB) can be used to mark the end of data.



W616000

Disable Terminating Character Suffix



W616001

Append CR



W616021

**** Append CRLF**



W616041

Append TAB

Chapter 14 Troubleshooting

Problem	Solution
Does not respond to input.	Disconnect the power adapter and then reconnect it.
Scanned data is not displayed on the host.	Ensure the scanner's communication parameters (such as baud rate, interface) match the host's settings.
Cannot read barcodes.	1. Follow the scanning instructions in this manual to scan barcode. 2. Ensure the barcode type is enabled. 3. Ensure the barcode is not defaced. Wrinkled, soiled or torn barcodes might be unreadable.



Headquarters

Fujian Newland Auto-ID Tech. Co., Ltd.

3F, Building A, No.1, Rujiang West Rd., Mawei, Fuzhou,
Fujian, China 350015

TEL: +86 - (0) 591-83979222

FAX: +86 - (0) 591-83979208

E-mail: marketing@nlscan.com

WEB: www.nlscan.com

Newland Europe BV

Rolweg 25, 4104 AV Culemborg, The Netherlands

TEL: +31 (0) 345 87 00 33

FAX: +31 (0) 345 87 00 39

Email: info@newland-id.com

WEB: www.newland-id.com

Tech Support: tech-support@newland-id.com

Newland North America Inc.

Address: 46559 Fremont Blvd., Fremont, CA 94538, USA

TEL: 510 490 3888

Fax: 510 490 3887

Email: info@newlandna.com

WEB: www.newlandna.com

Newland Taiwan Inc.

7F-6, No. 268, Liancheng Rd., Jhonghe Dist. 235, New
Taipei City, Taiwan

TEL: +886 2 7731 5388

FAX: +886 2 7731 5389

Email: info@newland-id.com.tw

WEB: www.newland-id.com.tw